
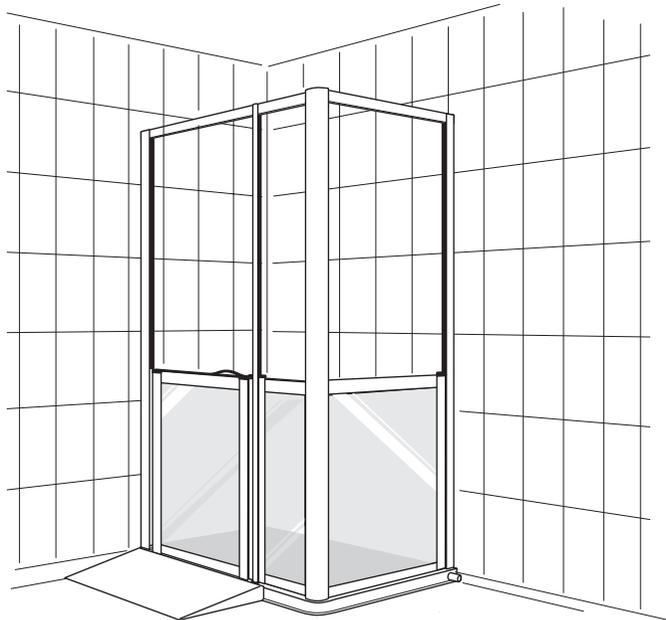


5 easy steps to fit a ... Dovedale MK2 Shower Tray

Installation Notes:

The waste outlet pipe is connected to existing drain through a running trap. Always ensure there is adequate fall of the waste pipe (We recommend 1:40).

Safety note: Please wear protective gloves when handling trays.

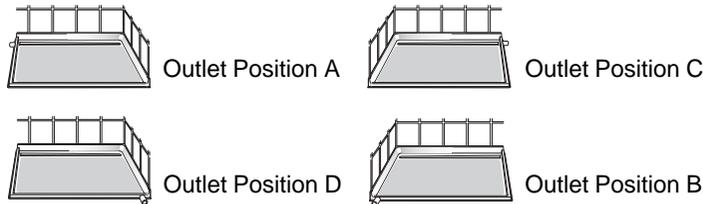

1. Checking level

Place the shower tray into the corner and ensure the shower base is level along its width and length as Fig 1.1.

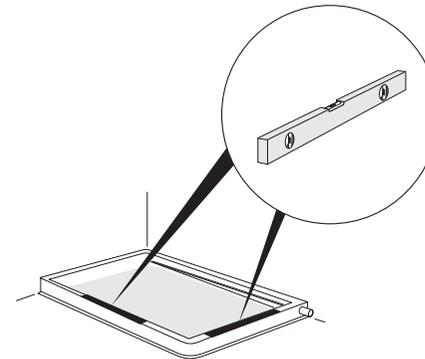


Fig 1.1

2. Marking plaster

Mark the plaster above the tiling lip, as Figure 2.1. Take the shower tray away.

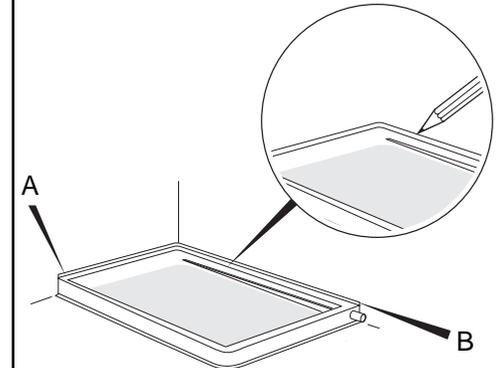



Fig 2.1

Important:

Tiles at A and B must be level and vertical to the surface of the tray to take wall channels.

5 easy steps to fit a ... Dovedale MK2 Shower Tray

3. Removing the Plaster

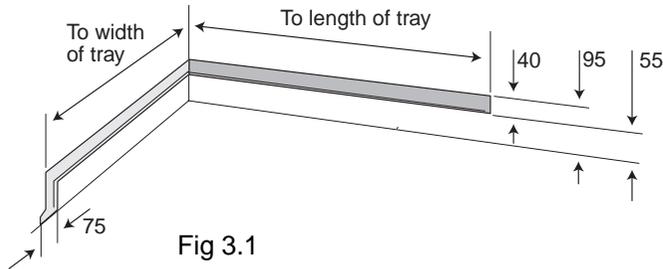

Remove the plaster below the mark you just made to a depth suitable to take the tiling lip, as Fig 3.1.

This will vary according to the thickness of the tile to be used as Fig 3.2.

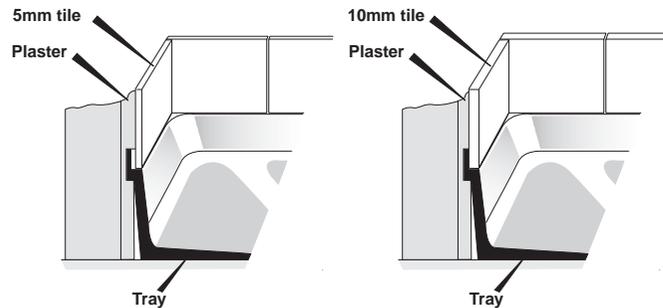


Fig 3.2

4. Drilling lip

Drill and countersink the tiling lip at the points shown in Fig 4.1. Mark and plug the walls. Apply silicon sealant to the underside edges of the tray and fix tiling lips securely with 1 1/2" No 8 screws provided. Drill through bottom lip into the floor to secure the tray to the floor, as Fig 4.2 checking the tray is level before final fixing.




Fig 4.1




Fig 4.2

Insert packing strips to level if required.

5. Tiling

When fastening is complete, tile down to the angle of the tiling lip using waterproof adhesive and grout.

If you require additional help

Northern Division

66-68 Manchester Road, Chapel-en-le-Frith, High Peak SK23 9TP
Tel: 01298 816366 Fax: 01298 816106

Southern Division

6 Wedgwood Road Bicester Oxon OX26 4UL
Tel: 01869 246470 Fax: 01869 247214

Northern Ireland

5 Balloo Way, Balloo Industrial Estate, Bangor, Co Down BT19 7QZ
Tel: 028 9145 0497 Fax: 028 9127 0046

6 easy steps to fit a ... Dovedale MK2 Shower Enclosure

1. Marking position of wall channel




Note: Always fit the Dovedale end panel before proceeding with assembly. Place one of the wall channels in the slot on the tray and against the wall. Make sure it is vertical, as Fig 1.1. Pencil on the walls alongside the wall channel to mark the position, as Fig 1.2. The adjustment slots should be facing inwards as Fig 1.3. The flange part of the wall channel should be approximately 18mm from the tray edge. Using a pencil mark through the 4 slots as Fig 1.4 and drill the wall 2" (50mm) deep as Fig 1.5. Apply a film of silicone sealant to the inside edge of the wall channel. Use 1 1/2" (38mm) screws & rawl plugs and fix wall channel to wall. Slide in the large end panel and fit into wall channel as Fig 2.1. Fix with screws, slot covers and shakeproof washers as Fig 2.2. Do not fully tighten screws.

2. Drilling the wall

Slide curved corner section on to panel and over pre-fixed corner block and tighten. Make sure the grub screw (at bottom of corner section) fastens securely to pre-fixed block using Allen key provided as Fig 2.3. Fix to end panel with screws, slot covers and shakeproof washers. Do not fully tighten screws.

3. Fixing the pole section and fitting (continued)

Place the small panel into the curved corner section and fix with screws, slot covers and shakeproof washers, as Fig 3.1. Do not fully tighten. Check black spiked seal is at the bottom. Slide on the full height pole with the bottom fixing plate in position as Fig 3.2 ensuring the screw holes are on the outside. Do not drill yet. Fix the full pole section to the small panel with screws, slot covers and shakeproof washers as Fig 3.3. Do not fully tighten. Place the other wall channel in position and fix, as step 2 (see Figs 3.4-3.7). Note: The flange part of the wall channel should be approximately 18mm from tray edge. **NOTE: Doors always open outwards.** Standing the door(s) on the tray will tell you if it is a left or right hinged door. Slide door into the appropriate channel and fix with screws, slot covers and shakeproof washers. Do not fully tighten. Ensure black spiked seal is at bottom and in contact with tray as Fig 4.1. Fix door receiver into opposite channel* as Fig 4.2.

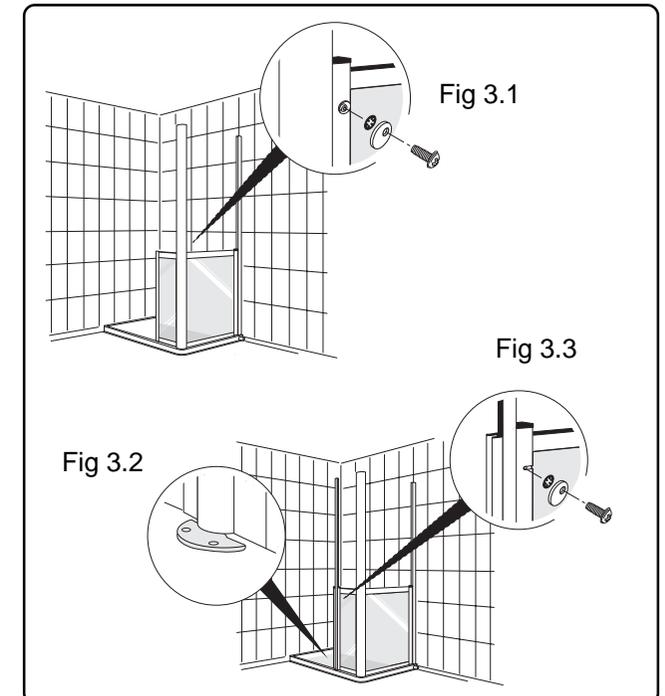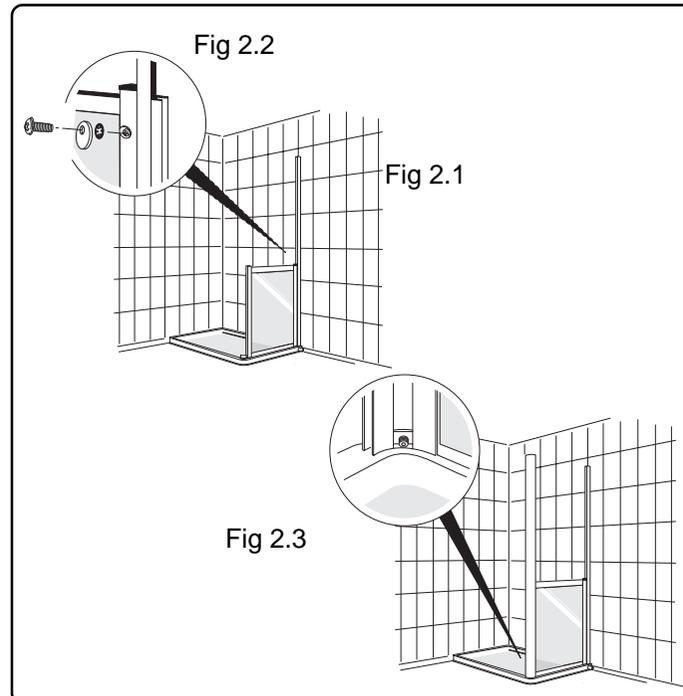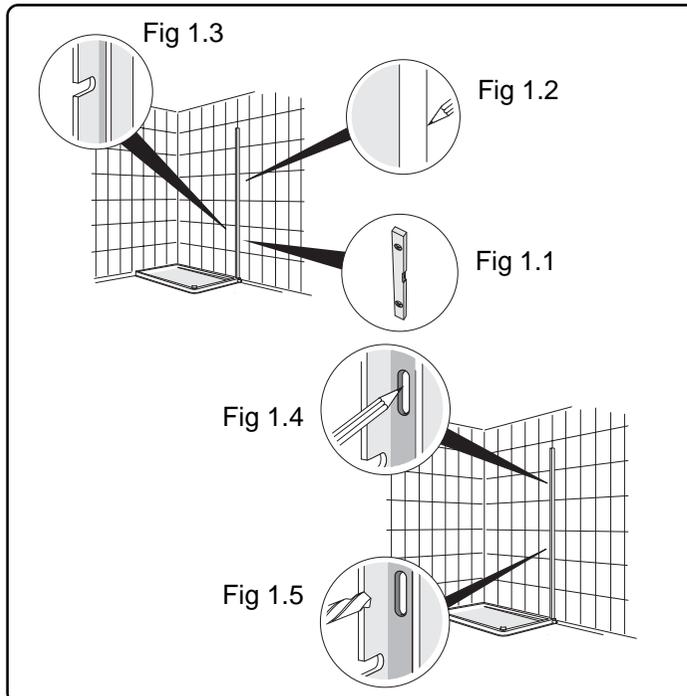

6 easy steps to fit a ... Dovedale MK2 Shower Enclosure

Note: These instructions cover both full and half height enclosures.

3. Continued

Close the doors and check that the magnetic strip in the door receiver makes contact. Magnets hold the door closed, adjust receiver if necessary. Ensure the seals are in contact with the tray. Align the jamb correctly. Recheck that the doors open and close properly. When satisfied fully tighten all screws, slot covers and shakeproof washers.

***NOTE: Except pair of doors (when receiver is attached to door at factory) Final adjustment should be left until enclosure is fully erected. Examples shown are for right hand hinged.**

4. Assembling top span (half height enclosure)

Top span is in 3 sections (short & long pieces for the front, medium for the side as Fig 6.2). Insert black dust covers into all top spans facing downwards as Fig 6.1. Assemble the front section first. Using the 4 hole connector provided join the top spans and leave a gap to accommodate the pole as Fig 6.1. Make sure pre-drilled holes are on the inside. Before fastening in place insert nut into top of each span - this is for fixing curtain rail later, as Fig 6.1. Repeat above for end section.

Note: Always use one of the black slot covers supplied between screw and frame, except on top span where shake proof washers **MUST** be used as Fig 6.2.

5. Fit end caps

Fit end caps as shown in Fig 6.4. Snap on the two black ribbed pole covers as Fig 6.5. **NOTE: Not applicable if using full height enclosure. Insert the four black channel covers as Fig 6.6.** Check enclosure is square and vertical. Check doors open and close correctly. Check jamb pole fixing plate is correctly aligned as Fig 7.1. Not applicable if full width door option is fitted. Using drill bit provided drill tray and screw pole fixing plate in position as Fig 7.2. Re-adjust locking screws if necessary.

6. Fit curtain rail

Load up with curtain hooks glides and end stops, before fixing. Use the 3 curtain rail brackets and fix using 3 x M5 x 6mm screws and nuts for top span and 3 x M5 x 10mm screws and nuts for curtain rail. Position brackets evenly over the 3 top spans as Fig 6.2. Attach shower curtain to hooks on rail, as Fig 7.3.

