

# 9 easy steps to fit a ... Edale MK2 Shower Enclosure

## 1. Marking the wall

Place the wall channel onto the niche in the tray where the channel should abutt as Fig 1.1.

Make sure it is vertical as Fig 1.2 and mark the wall alongside the wall channel. The slots on the wall channel should be facing into the shower area as shown in Fig 1.3.

## 2. Drilling the wall

Using a pencil mark through the slots and drill the wall 50mm deep (2") using a 5.5mm drill, as Figs 2.1/2.2.

Secure to wall with wall plugs and 1½ x No 8 screws.

## 3. Fixing jamb panel

Push panel into wall channel. Fasten loosely with self tapping screws, slot covers and shakeproof washers provided as fig 3.1.

Check panel is level horizontally and vertically. Adjust if necessary. Screws are fully tightened later.

## 4. Pole assembly location and fix-

Assemble the vertical and horizontal grab poles. Ensure pole base cap is in position on the bottom of the vertical pole section, with holes facing outwards, as fig 4.1. Do not drill at this stage.





The horizontal bar is fully adjustable and should be locked at a height to suit the user. Slide assembly onto jamb panel.

Ensure that vertical pole is upright using a spirit level and secure with screws and slot covers. Do not fully tighten self tapping screws, as Fig 5.1.

## 5. Drilling the wall

Place the tri-fold door onto the wall in position ensuring the bottom of the door is in the tray, as Fig 6.0. Ensure the door is against the wall and is to the right of the tray slot. This is for a right hand tray. Check the door is vertical as fig 6.1. and mark the wall for the wall channel, as Fig 6.2.

Slide horizontal bar down vertical pole to the required height. Mark the walls for fixing the door. Drill the wall with 5.5mm drill (2") as Fig 7.2. Secure to wall with 1½ x No 8 screws. Check height and fully tighten fixing screws.

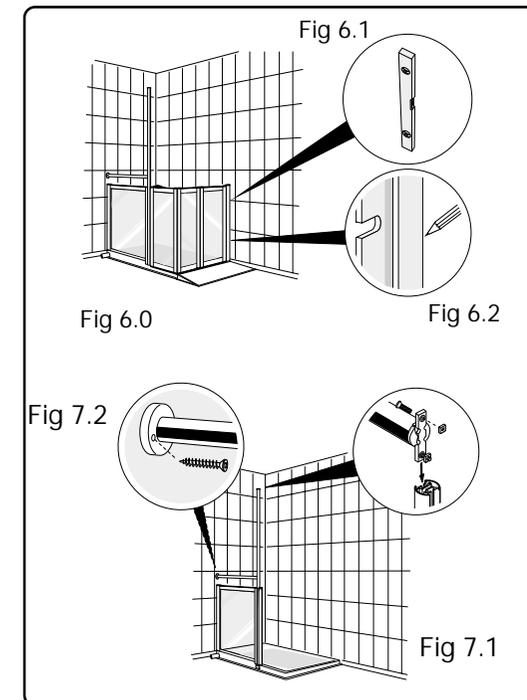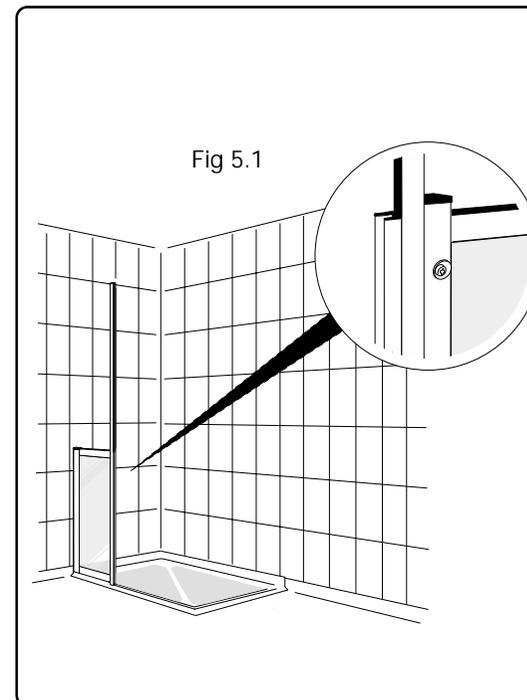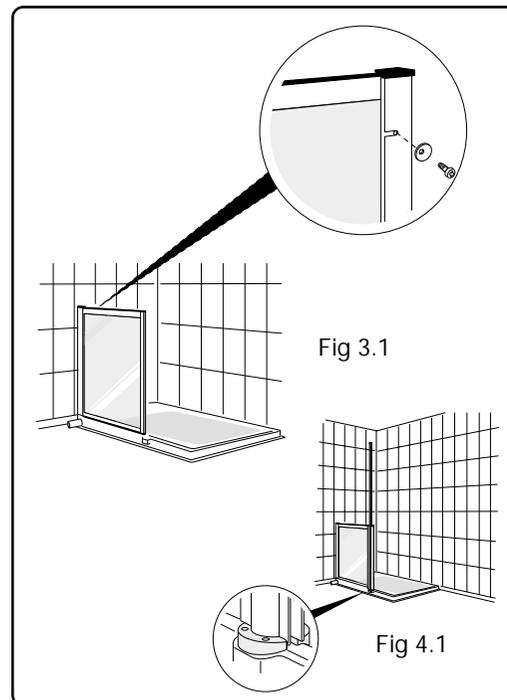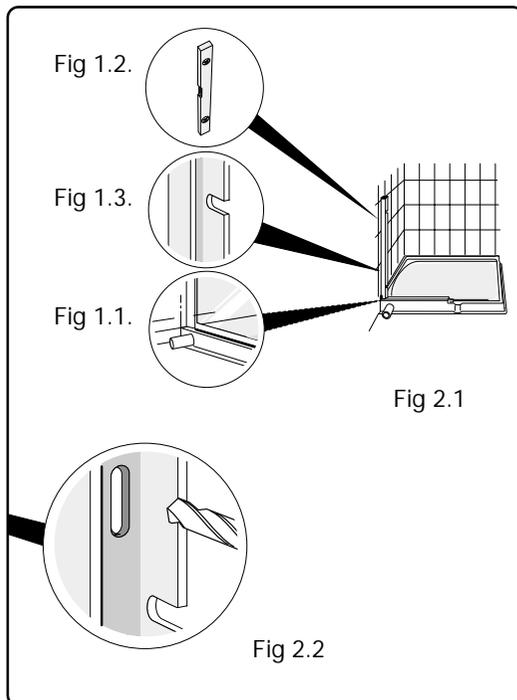

# Enclosure

the tray in its fully open  
n seal is in contact with  
the wall channel is flat  
the extreme right of the  
and tray. It is on the left  
the wall channel is  
the wall alongside the

vertical pole to a suitable  
fixing the wall brackets.  
to a depth of 50mm  
wall with wall plugs and  
horizontal pole is level  
ys as used in Fig 7.1.

## 6. Fixing doors

Remove the tri-fold doors from the tray and slide off the wall channel. Using a pencil mark through the slots and drill the wall 50mm deep (2") using a 5.5mm drill and secure to wall, as Figs 8.1 - 8.3.

Replace tri-fold doors, as Fig 8.1. Check magnetic strips are in contact with each other. Adjust doors to open and close correctly, ensuring the bottom seal is in contact with the tray. Fully tighten screws, slot covers and shakeproof washers as Fig 8.4

## 7. Fitting end caps

Drill and fix pole base cap with cheese head screws provided.

Fit end caps as shown in fig 9.1. Please note on final fixing end caps need to be secured in position using silicone. Apply a film of silicone sealant to the inside edges of the two wall channels. Cut and fit pole cover strips as Fig 9.2.

## 8. Fit curtain rail brackets

Position curtain rail at height to connect to bracket at top of grab pole. Mark walls for fixing wall brackets, as Fig 10.1. Drill wall with 5.5mm drill to a depth of 2" (50mm). Fix curtain rail brackets to wall with plugs and 1 1/2 x 8 screws, as fig 10.2.

Load hooks and glides into bottom channel of curtain rail. Place 1 M5 nut in top channel of curtain rail.





Attach to brackets and tighten with the allen key as Fig 10.3.

## 9. Attaching curtain rail

Check pole is vertical. Using M5 x 10mm stainless steel screw Attach to curtain rail with nut already in place as Fig 11.1.

Using M5 x 10mm stainless steel screws Secure pole bracket to top of pole rail as Fig 11.2.

Attach shower curtain to hooks on rail, as Fig 11.3.

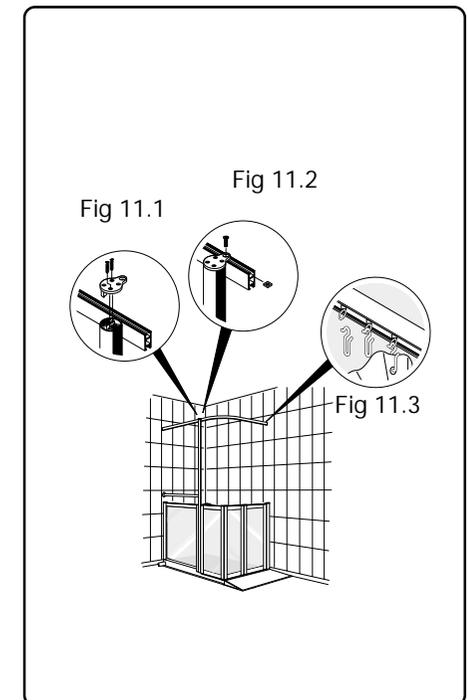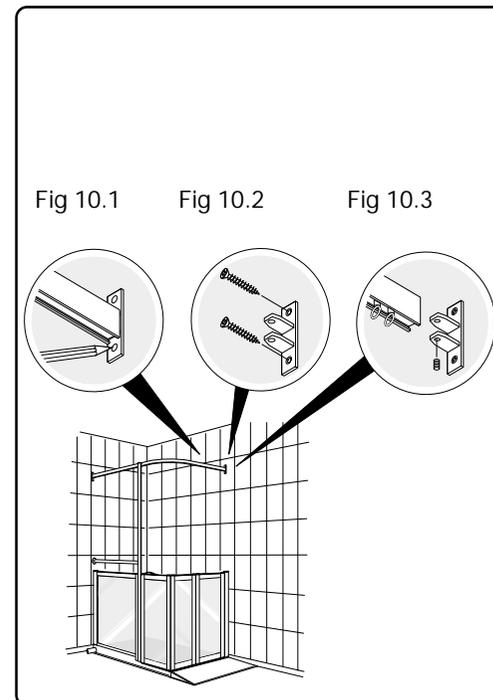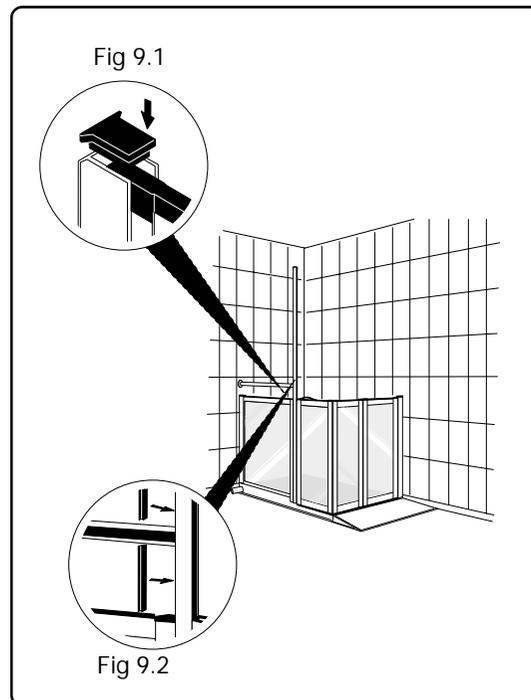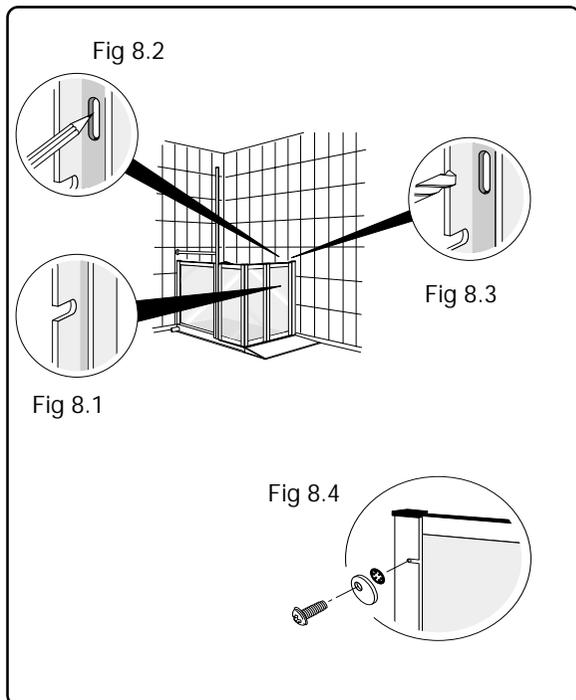


# Edale MK2 Tray & Enclosure Installation Guide




Solutions for Living

## Installation Notes:


If the access ramp supplied is to be used by the client, find out if a thick carpet or other floor covering will be laid down after installation. If so the tray will need to be raised using hardboard or plywood to compensate for the floor covering. If a wheelchair is to be used an allowance of 1500mm should be made from lower end of ramp to the nearest obstruction. The waste pipe is connected through a 3" running trap. It is essential to ensure adequate fall of the waste pipe.



Left hand outlet Edale MK2



Right hand outlet Edale MK2

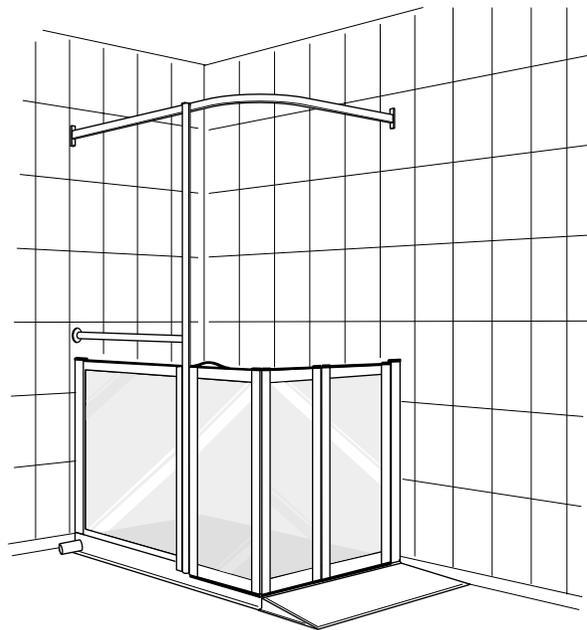

# 5 easy steps to fit a ... Eco

## 1. Checking level

Place the shower tray into the corner and ensure that the shower base is level along its width and length as Fig 1.1.

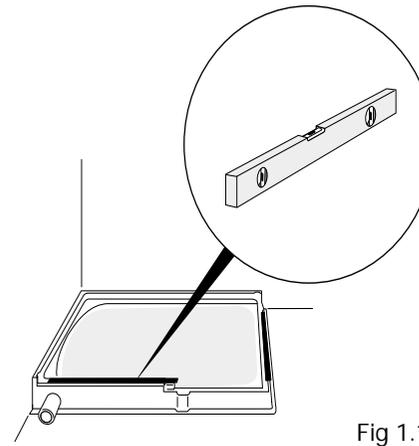


Fig 1.1

## 2. Marking plaster

Mark the plaster above the tiling lip as Fig. 2.1. Take the shower tray away

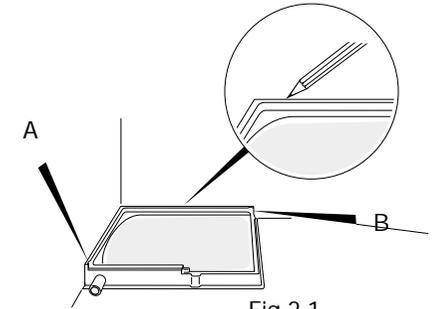


Fig 2.1

**Important:**  
Tiles at A and B must be level and vertical to the surface of the tray to take wall channels.

Copyright © Chiltern Invadex Ltd. The design of the product shown in this installation guide is vested in Chiltern Invadex Ltd and should not be copied or reproduced in anyway whatsoever without the express permission in writing of Chiltern Invadex Ltd.




Published by Chiltern Invadex Ltd 6 Wedgwood Road Bicester Oxon OX26 4UL Registered in England No: 1182024 CINV 26.63  
In Northern Ireland: Chiltern Invadex (NI) Ltd, 5 Balloo Way, Balloo Industrial Estate, Bangor, County Down BT19 7QZ Registered No: NI 19958

# Male MK2 Easy Access Shower Tray

## 3. Removing the Plaster

Remove the plaster below the mark you just made to a depth suitable to take the tiling lips (see Fig 3.1)

This will vary according to the thickness of the tile to be used (see Fig 3.2)

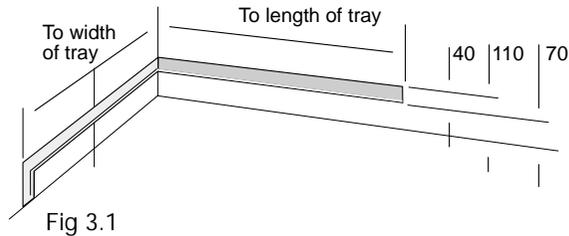

## 4. Drilling lip

Drill and countersink the tiling lip at the points shown in fig 4.1. Mark and plug the walls. Fix tiling lips securely with 1½ No 8 screws provided as shown in Fig 4.1. Drill through bottom lip into the floor to secure the tray to the floor, as Fig 4.2, checking that tray is level before final fixing.




Fig 4.1

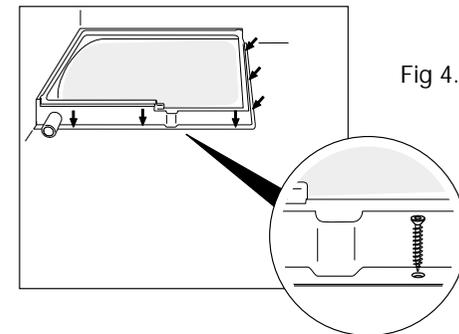


Fig 4.2

## 5. Tiling

Tile down to the tiling lip using waterproof adhesive and grout.

## If you require additional help

### Southern regional office

6 Wedgwood Road Bicester Oxon OX6 7UL  
Tel: 01869 246470 Fax: 01869 247214

### Scottish divisional office

Unit 16, Evans Business Centre, 64-78 Queen Elizabeth Avenue,  
Hillington Industrial Estate, Glasgow, G52 4NQ

Tel: 0141 880 9986 Fax: 0141 880 9990

### Northern Ireland

5 Balloo Way, Balloo Industrial Estate, Bangor, Co Down BT19 7QZ

Tel: 02891 450497 Fax: 02891 270046

**Chiltern**  
**Invadex**

Solutions for Living